




# BL1000SS

Standalone, no connection required.

GENERATE CODES AND  
KEY FOBs FROM HOME OR OFFICE

NO NEED TO LOAD  
INFORMATION TO THE LOCK

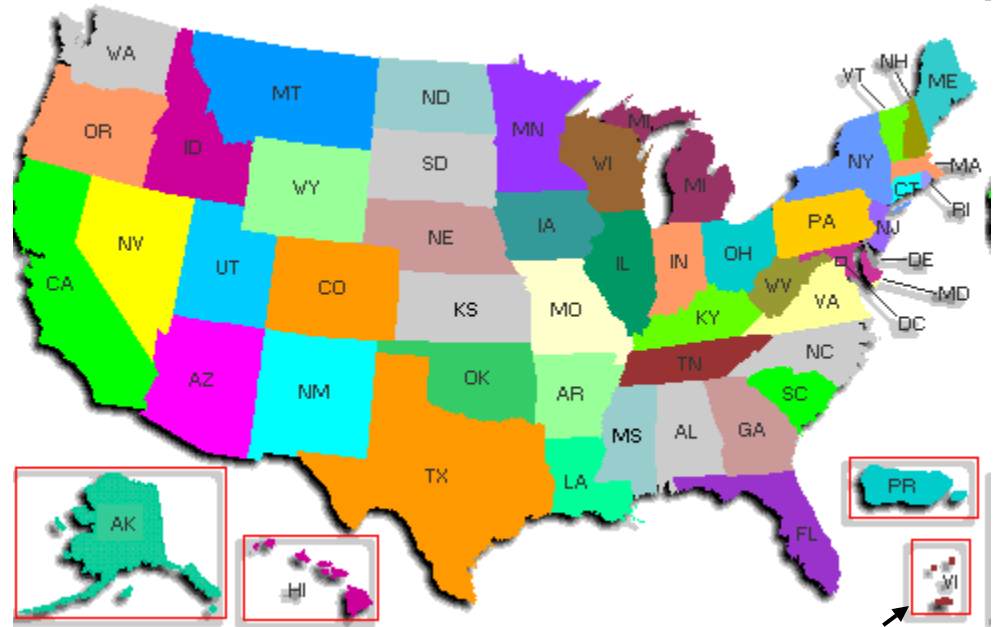

GENERATE CODE OR  
ACTIVATE KEYFOB



SEND CODE OR KEY FOB  
TO CUSTOMER



CUSTOMER OPENS  
DOOR AT PROPERTY





# BELINE TECHNOLOGY

## BeLine's Algorithm for Code Generation


Lock Serial Number →

Unique Software ID →

Start Date of Code →

End Date of Code →


Other Private  
Parameters →

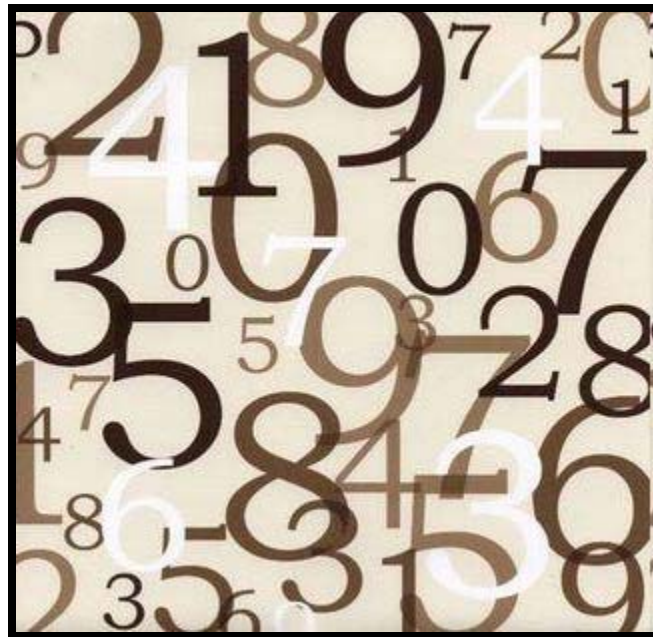

→ Unique 8 digit  
access code



# THE 8 DIGIT CODE

- Starts and expires on specified date and time.
- Can be stored to iButton Key Fob  so the customer doesn't have to type in numbers.
- Will not work on any other BL1000SS lock.
- Access codes are generated “Away From The Lock” without the need to load access rights information to the lock.



# Lock Features

- Accepts remotely generated codes and activated iButton Key Fobs.
- Completely standalone (no network required).
- Uses standard 4 AA batteries (lasts 2 to 3 years).
- Backlit external grade metal keypad.
- Extract 4000 previous time stamped entries.
- Store permanent administrator codes and key fob access.
- Calendar schedules for permanent administrator access.
- Traditional metal key override with easy rekey capability.
- Optional stay unlocked after using a valid code or key fob.
- Optional timed unlock and lock.
- Anti tamper to guard against code guessing.



• ADA compliant.



# Required Software

- Runs on Windows XP
- 1 license controls up to 50 BL1000SS locks.
- Provides Initial lock configuration.
- Does not require internet connection.
- Different user levels.



# Hardware Options

- Rust-proof heavy duty chassis.
- Forged brass levers.
- Heavy duty spring cage prevents sagging levers.
- UL listed** latch for 3 hour fire labeled doors.
- Die cast steel retractor with bronze roller bearings for extended life cycle.
- Featuring clutch System, freewheeling to deter breaking of the handle.
- 6 pin solid brass "C" keyway standard.
- Interchangeable core locks will accept 6 or 7 pin cores compatible with BEST, FALCON and ARROW.
- UL listed for 3 hour fire labeled doors.
- 2-3/4" North American backset (2-3/8" backset optional).
- Supports 1-3/8" to 1-3/4" thickness doors (2" to 2 - 1/4" upon request).
- Meets or exceeds of BHMA/ANSI A 156.2 Series 4000, grade 1 requirements.
- Meets ADA requirements for barrier free application.

## Small. Office. Home. Office



S.O.H.O Version

## Commercial / Industrial



Mortise Version

1" throw heavy duty deadbolt with anti-saw hardened pins.